


U.S. BATTERY MFG. CO. SPECIFICATION GUIDE

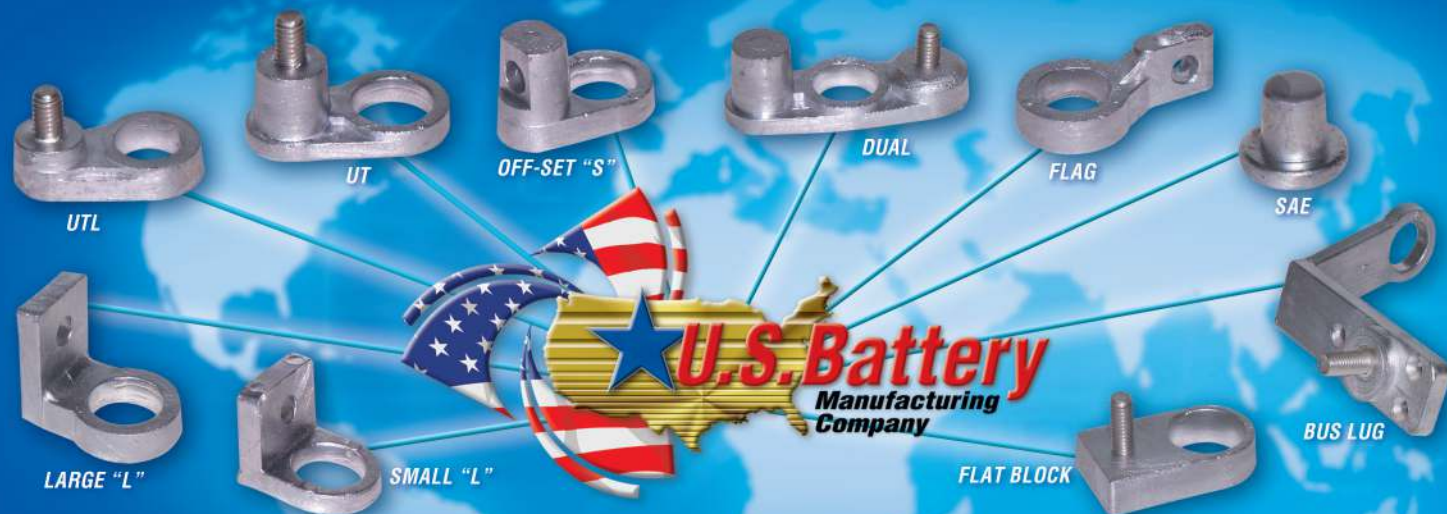

1675 Sampson Ave.
Corona, CA 92879
(800) 695-0945

1895 Tobacco Road
Augusta, GA 30906
(800) 522-0945

717 North Belair Rd.
Evans, GA 30809
(888) 811-0945



MADE WITH PRIDE IN THE U.S.A.

WWW.UUSBATTERY.COM

WWW.UUSBATTERY.COM

U.S. BATTERY

SPECIFICATIONS

DEEP CYCLE BATTERIES

| US BATTERY MODEL | AMP HOURS (20 hr. rate) | AMP HOURS (5 hr. rate) | M.C.A. @ 32° F | MINUTES @ 75 AMPS | MINUTES @ 25 AMPS | DIMENSIONS, Inches (mm) | | | COVER AND CASE | PALLET QTY |
|------------------|-------------------------|------------------------|----------------|-------------------|-------------------|-------------------------|-------|--------|----------------|------------|
| | | | | | | LENGTH | WIDTH | HEIGHT | | |

6 VOLT GOLF CAR & MULTI PURPOSE

| | | | | | | | | | | |
|------------|-----|-----|---|-----|-----|--------------|-------------|--------------|---------|----|
| US 1800XC2 | 208 | 157 | - | 107 | 392 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | BLK/BLK | 48 |
| US 2000XC2 | 216 | 172 | - | 115 | 445 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | BLK/BLK | 48 |
| US 2200XC2 | 232 | 181 | - | 122 | 474 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | RED/WHT | 48 |
| US 125XC2 | 242 | 198 | - | 140 | 517 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | GRN/WHT | 48 |
| US 145XC2 | 251 | 213 | - | 154 | 562 | 10 1/4 (260) | 7 1/8 (181) | 11 7/8 (302) | BLU/WHT | 48 |

8 VOLT GOLF CAR & MULTI PURPOSE

| Min. @ 56 Amps | | | | | | | | | | |
|----------------|-----|-----|-----|-----|-----|--------------|-------------|--------------|---------|----|
| US 8VGCXC2 | 155 | 129 | 110 | 75 | 312 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | BLK/BLK | 48 |
| US 8VGCXC2 | 170 | 138 | 128 | 90 | 337 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | RED/WHT | 48 |
| US 8VGCXC2 | 183 | 147 | 136 | 95 | 365 | 10 1/4 (260) | 7 1/8 (181) | 11 1/4 (286) | BLU/WHT | 48 |
| US 8VHATBXC2 | 205 | 170 | 164 | 115 | 435 | 10 1/4 (260) | 7 1/8 (181) | 11 7/8 (302) | RED/WHT | 48 |

6 VOLT GOLF, SWEEPER/SCRUBBER & MULTI PURPOSE

| | | | | | | | | | | |
|-------------|-----|-----|---|-----|-----|--------------|-------------|--------------|---------|----|
| US 250EXC2 | 225 | 195 | - | 140 | 505 | 11 5/8 (295) | 7 1/8 (181) | 11 5/8 (295) | BLU/BLK | 36 |
| US 250XC2 | 255 | 217 | - | 159 | 570 | 11 5/8 (295) | 7 1/8 (181) | 11 5/8 (295) | BLK/BLK | 36 |
| US 250HCXC2 | 280 | 239 | - | 178 | 635 | 11 5/8 (295) | 7 1/8 (181) | 11 5/8 (295) | BLU/BLU | 36 |
| US 305EXC2 | 290 | 245 | - | 182 | 660 | 11 7/8 (302) | 7 1/8 (181) | 14 5/8 (371) | BLU/BLK | 18 |
| US 305XC2 | 310 | 261 | - | 195 | 715 | 11 7/8 (302) | 7 1/8 (181) | 14 5/8 (371) | BLK/BLK | 18 |
| US 305HCXC2 | 340 | 283 | - | 215 | 790 | 11 7/8 (302) | 7 1/8 (181) | 14 5/8 (371) | BLU/BLU | 18 |
| L16EXC2 | 360 | 270 | - | 198 | 795 | 11 7/8 (302) | 7 1/8 (181) | 16 3/4 (425) | BLU/BLK | 18 |
| L16XC2 | 385 | 297 | - | 225 | 865 | 11 7/8 (302) | 7 1/8 (181) | 16 3/4 (425) | BLK/BLK | 18 |
| L16HCXC2 | 420 | 323 | - | 250 | 965 | 11 7/8 (302) | 7 1/8 (181) | 16 3/4 (425) | BLU/BLU | 18 |
| 1 HCXC2 | 95 | - | - | 44 | 165 | 8 3/4 (222) | 6 7/8 (175) | 9 (175) | BLK/BLK | 72 |

12 VOLT GOLF, SWEEPER/SCRUBBER & MULTI PURPOSE

| | | | | | | | | | | |
|-------------|-----|-----|---|-----|-----|--------------|--------------|--------------|---------|----|
| US 12VXC2 | 155 | 122 | - | 77 | 292 | 13 1/8 (333) | 7 1/16 (179) | 11 3/8 (289) | BLU/BLU | 36 |
| US 12VEXC2 | 145 | 115 | - | 62 | 270 | 13 1/8 (333) | 7 1/16 (179) | 11 3/8 (289) | BLK/BLK | 36 |
| US 185XC2 | 200 | 158 | - | 106 | 398 | 15 5/8 (397) | 7 1/16 (179) | 14 7/8 (378) | BLK/BLK | 14 |
| US 185HCXC2 | 220 | 172 | - | 117 | 443 | 15 5/8 (397) | 7 1/16 (179) | 14 7/8 (378) | BLK/BLK | 14 |
| US 185EXC2 | 185 | 144 | - | 93 | 355 | 15 5/8 (397) | 7 1/16 (179) | 14 7/8 (378) | BLK/BLK | 14 |

8 VOLT MARINE

| | | | | | | | | | | |
|------------|-----|---|---|-----|-----|---------------|--------------|--------------|--------|----|
| 11-4-1 XC2 | 145 | - | - | 101 | 323 | 19 1/4 (489) | 7 1/2 (191) | 10 3/4 (273) | RUBBER | 24 |
| 13-4-1 XC2 | 170 | - | - | 116 | 380 | 21 7/16 (555) | 7 1/2 (191) | 10 1/2 (267) | RUBBER | 24 |
| 15-4-1 XC2 | 195 | - | - | 133 | 440 | 24 3/8 (619) | 7 7/16 (189) | 10 1/2 (267) | RUBBER | 16 |
| 17-4-1 XC2 | 220 | - | - | 147 | 490 | 27 7/16 (698) | 7 7/16 (189) | 10 1/2 (267) | RUBBER | 16 |
| 19-4-1 XC2 | 245 | - | - | 162 | 545 | 26 3/4 (679) | 8 7/16 (216) | 11 1/8 (282) | RUBBER | 16 |

12 VOLT SWEEPER/SCRUBBER, MARINE & MULTI PURPOSE

| CCA @ 0°F | | | | | | | | | | |
|-------------|-----|----|-----|----|-----|----------------|-------------|-------------|---------|----|
| US 24 DCXC2 | 85 | 68 | 400 | 38 | 145 | 11 13/16 (300) | 6 3/4 (171) | 9 3/4 (248) | BLU/BLU | 72 |
| US 27 DCXC2 | 105 | 89 | 575 | 54 | 205 | 12 3/4 (324) | 6 3/4 (171) | 9 3/4 (248) | BLU/BLU | 54 |
| US 31 DCXC2 | 130 | 99 | 620 | 59 | 225 | 13 (330) | 6 3/4 (171) | 9 3/4 (248) | BLU/BLU | 54 |

12 VOLT MULTI PURPOSE

| | | | | | | | | | | |
|----------|-----|-----|---|-----|-----|--------------|--------------|-------------|---------|----|
| 8D-HCXC2 | 240 | 177 | - | 115 | 470 | 20 3/4 (527) | 11 1/8 (283) | 9 7/8 (251) | BLK/BLK | 16 |
|----------|-----|-----|---|-----|-----|--------------|--------------|-------------|---------|----|

6 VOLT RENEWABLE ENERGY

| | | | | | | | | | | |
|--------------|-----|-----|---|-----|-----|--------------|-------------|--------------|---------|----|
| US RE L16XC2 | 401 | 317 | - | 245 | 915 | 11 7/8 (302) | 7 7/8 (181) | 16 3/4 (425) | GRN/GRN | 18 |
| US REGC2HXC2 | 242 | 194 | - | 136 | 507 | 10 1/4 (260) | 7 1/8 (181) | 11 7/8 (302) | GRN/GRN | 48 |

2 VOLT RENEWABLE ENERGY

| | | | | | | | | | | |
|----------------|------|-----|---|-----|------|--------------|-------------|--------------|---------|----|
| US RE L162VXC2 | 1100 | 962 | - | 845 | 2826 | 11 7/8 (302) | 7 7/8 (181) | 16 3/4 (425) | GRN/GRN | 18 |
|----------------|------|-----|---|-----|------|--------------|-------------|--------------|---------|----|

LOW MAINTENANCE STARTING BATTERIES

| BCI GROUP SIZE | US BATTERY MODEL | C.C.A. @ 0° F | C.A. @ 32° F | MINUTES @ 25 AMPS | DIMENSIONS, Inches (mm) | | | COVER AND CASE | PALLET QTY |
|----------------|------------------|---------------|--------------|-------------------|-------------------------|-------|--------|----------------|------------|
| | | | | | LENGTH | WIDTH | HEIGHT | | |

6 VOLT AUTOMOTIVE & COMMERCIAL

| | | | | | | | | | |
|------|------|-----|-----|-----|--------------|---------------|--------------|--------|----|
| 2E | 2E | 600 | 730 | 180 | 19 3/8 (492) | 4 1/8 (105) | 9 1/8 (232) | RUBBER | 60 |
| 17HF | 17HF | 360 | 440 | 115 | 7 3/8 (187) | 6 7/8 (175) | 9 1/4 (235) | RUBBER | 90 |
| 19L | 19L | 525 | 640 | 110 | 8 3/16 (208) | 6 11/16 (170) | 7 7/16 (189) | RUBBER | 90 |

12 VOLT TRUCK - BUS - COMMERCIAL

| | | | | | | | | | |
|------|------|------|------|-----|---------------|---------------|-------------|---------|----|
| 8D | H8D | 1400 | 1700 | 430 | 20 3/4 (527) | 11 1/8 (283) | 9 7/8 (251) | BLK/BLK | 16 |
| 17TF | 17TF | 625 | 765 | 150 | 17 1/16 (433) | 6 15/16 (176) | 8 (203) | RUBBER | 42 |

12 VOLT MILITARY ORDINANCE

| | | | | | | | | | |
|----------|-----|-----|------|-----|--------------|--------------|---------|---------|----|
| 6TL(mil) | 6TL | 825 | 1010 | 215 | 10 1/2 (267) | 11 7/8 (302) | 9 (229) | OLV/OLV | 32 |
|----------|-----|-----|------|-----|--------------|--------------|---------|---------|----|

12 VOLT GAS GOLF CAR & AUTOMOTIVE

| | | | | | | | | | |
|-----|--------|-----|-----|----|--------------|-------------|---------------|---------|----|
| 53 | 53K-30 | 360 | 440 | 65 | 12 3/4 (324) | 4 5/8 (117) | 8 15/16 (227) | BLK/BLK | 90 |
| 911 | 911-60 | 300 | 366 | 65 | 8 3/16 (208) | 6 7/8 (175) | 6 7/8 (175) | BLK/BLK | 90 |



6 & 12 Volt AGM - Sealed Non-spillable Batteries

| US BATTERY MODEL | AMP HOURS (20 hr. rate) | AMP HOURS (5 hr. rate) | M.C.A. @ 32° F | MINUTES @ 75 AMPS | MINUTES @ 25 AMPS | DIMENSIONS, Inches (mm) | | | COVER AND CASE | PALLET QTY |
|------------------|-------------------------|------------------------|----------------|-------------------|-------------------|-------------------------|-------|--------|----------------|------------|
| | | | | | | LENGTH | WIDTH | HEIGHT | | |

6 VOLT SEALED AGM

| | | | | | | | | | | |
|-------------|-----|-----|------|-----|-----|-------------|------------|-------------|------|----|
| US AGM 2000 | 213 | 182 | 855 | 124 | 475 | 10.24 (260) | 7.09 (180) | 10.79 (274) | GOLD | 32 |
| US AGM 6V27 | 214 | 172 | 1000 | 112 | 450 | 12.05 (306) | 6.61 (168) | 8.98 (228) | GOLD | 24 |
| US AGM 2224 | 224 | 175 | 855 | 120 | 450 | 10.24 (260) | 7.09 (180) | 9.96 (253) | GOLD | 30 |
| US AGM 250 | 260 | 212 | 895 | 149 | 572 | 11.61 (295) | 7.09 (180) | 11.73 (298) | GOLD | 24 |
| US AGM 305 | 312 | 273 | 865 | 208 | 736 | 11.61 (295) | 7.09 (180) | 14.41 (366) | GOLD | 12 |
| US AGM L16 | 390 | 326 | 875 | 255 | 915 | 11.61 (295) | 7.09 (180) | 16.85 (428) | GOLD | 12 |

12 VOLT SEALED AGM

| | | | | | | | | | | |
|------------|------|------|-----|-----|-----|-------------|------------|-------------|------|----|
| US AGM U1 | 32.3 | 29.8 | 280 | 13 | 51 | 7.68 (195) | 5.12 (130) | 7.09 (180) | GOLD | 95 |
| US AGM 27 | 99 | 82 | 900 | 52 | 185 | 12.05 (306) | 6.61 (168) | 9.06 (230) | GOLD | 24 |
| US AGM 31 | 100 | 85 | 960 | 52 | 190 | 13.00 (330) | 6.85 (174) | 9.37 (238) | GOLD | 24 |
| US AGM 185 | 234 | 191 | 930 | 125 | 518 | 15.24 (387) | 7.09 (180) | 14.49 (368) | GOLD | 10 |